## **Digital Signage KIOSK Series**





## **Product Features**

### **Digital Signage KIOSK Series**

offers touch screen advertising signage player Floor-stand advertising player. MTS signage player is outstanding with fresh appearance, easy operation and flexible installation. Instead of single touch, MTS offers 10 points multi-touch to satisfy your need on advertising and interactive with multi-users.

The displays are in 16:9 aspect ratio with the size of 21.5", 32", 43", 49", 55" and 65". The advertising player series are the best choice for digital signage, interactive information, kiosk, industry automation and other applications.

#### **UMSCVD** series

- UMSC215-VD
- UMSC32-VD
- UMSC43-VD
- UMSC49-VD
- UMSC55-VD
- UMSC65-VD





### **Product Features**

- Sharp, exquisite appearance with full metal chassis
- Toughened glass with Level 7 Mohs hardness
- Thick metal plate inside to robust structure
- Durable stand without shaking
- Wheels installation is optional
- System compatible with touch screen monitor/ Windows/ Android touch all-in-one PC


















## **Product Features**

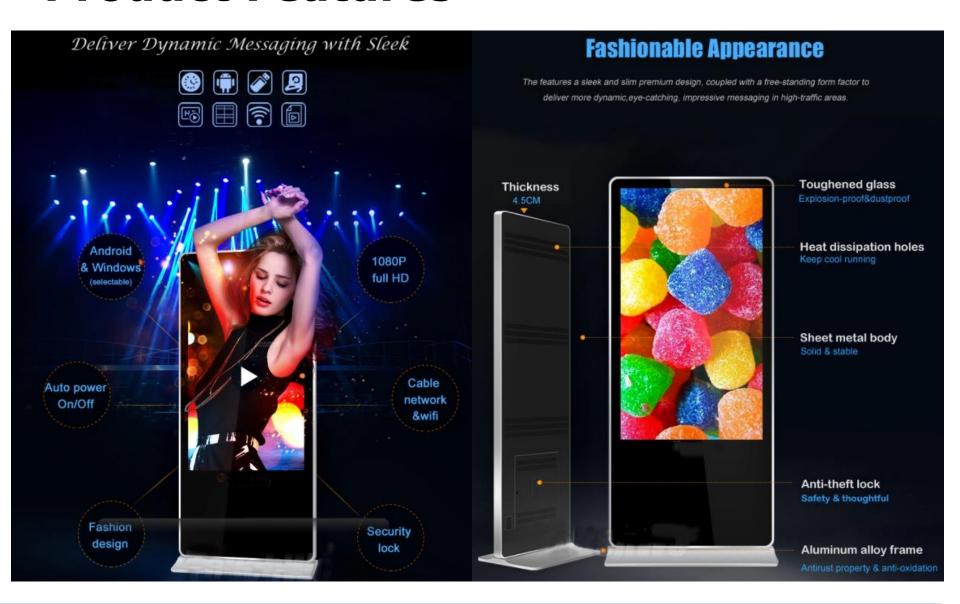



### **Measurement**

Specification	21.5 inch	32 inch	43 inch	49 inch	55 inch	65 inch
Aspect ratio	16:9	16:9	16:9	16:9	16:9	16:9
Display area	478*270mm	699*394mm	938*528mm	1075*605mm	1210*681mm	1426.5*801.5mm
Machine Dimension	1720*343*37mm	1780*468*45mm	1788*645*47mm	1888*696*53mm	1888*807*47mm	2130*936*60mm
N.W.	30Kg	42Kg	56Kg	62kg	68kg	75kg

### **Specification**

#### **Touch Screen Parameters**

Touch Screen Type: Capacitive Touch Screen/Infrared Touch Screen Response time: < 5ms Touch POINTS: 10-Point Touch/6-Point Touch Touch effective identification: > 1.5mm(Finger, Touch Pen) Scanning frequency: 200 Hz Scanning accuracy: 4096×4096 Communication mode: FUII Speed USB 2.0,3.0 Theoretical clicks: 5000Million Times Operating current/voltage: 180Ma/DC+5V±5% Anti-light interference: Can e used as normal under Sunlight and other lights Touch data output mode: Coordinate Output Surface hardness: Mohs7-step Explision-proof Tempered Glass Operating System: Windows 7/8 /10/ Windows XP / Linux /MAC OS /Android Drive: Free Drive, Plug And Play

#### **LED Screen Parameters**

Screen type: LED Back Light, A-type

Refresh frequency: 60Hz

Viewing angle: Horizontal 178 Degree, Vertical 178 Degree

Service life: > 50000Hours

#### **Power Supply Parameters**

Input Power: 110-240V AC 50/60Hz

Overall Power Consumption: < 60W or 120-280W

Standby Power Consumption: < 1W

### **Working Environment**

Operation temperature:	-10°C-60°C
Working humidity:	10% - 95%
Storage temperature:	0°C-40°C
Storage humidity:	10% - 95%




### **AIO System Configuration**

Program	Touch screen monitor	Android	X86 Standard version	X86 Elite version	X86 Deluxe version	OEM Service
Chip		Octa core RK3368 Quad core RK3288 Hexa core RK3399	default: Intel Celeron Quad J1900	Industrial motherboard (13、15、17)	H110 motherboard CPU: (I3, I5, I7)	
Ram		2G/4G	2G/4G/8G/16G			
Hard disk	Need to connect computer to help work,	Standrad 8G, optional 16/32G	SSD: 32G/64G/128G/256G/512G HDD:500G/1T			YES
Graphics cards	more details pls check parameters 3.1	Android HD	Core Graphics		Core Graphics (Dedicated Graphics optional)	
Resolution		720P/1080P				
os		Version 7.1.2 Inner core 4.4.71	Multi-touch:Win 7/ Win 8/Win 10/ Linux Single-touch: XP/CE/MAC Default Win OS			
Network	Integrated 10/100 / 1000M adaptive network card, wireless network card 802.11a / b / g / n					
Input Power	110-240V AC 50/60Hz					





# **Target Applications**

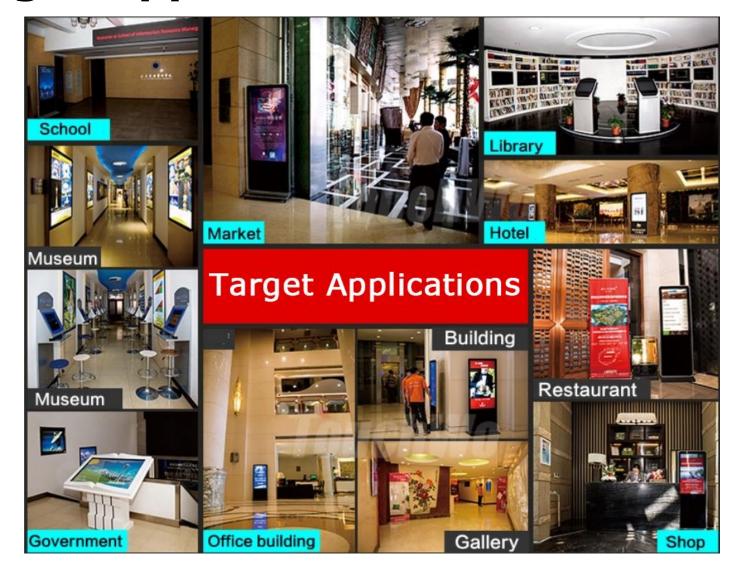



# **Business Opportunity**

### For Business Opportunities & Questions!

sales@mightecsys.com

MIGHTEC SYSTEMS CO., LTD.

